

INSTALLATION INSTRUCTIONS LA995 STEM KIT

SAFETY INFORMATION Read carefully for your protection and save all instructions



WARNING

Risk of Fire / Electric Shock
If not qualified, consult an electrician

Keep away from flammable materials

Disconnect power at fuse or circuit breaker before installing or servicing

- Wear rubber soled shoes and work on a sturdy wooden or fiberglass ladder
- NOTE: Fixture should be used on a circuit that is properly protected with a fuse or circuit breaker.
- This lighting system must be installed according to National Electric Code and local building codes.
- To avoid a hazard to children, account for all parts and destroy all packing materials.

Risk of Electric Shock

Use only fixtures and fittings intended for use with this kit

Risk of Burn

Disconnect power and allow fixture to cool before changing bulb or handling fixtures

- Do not install any lampholder closer than 6" from any curtain or similar combustible material.
- Do not touch hot lens, guard or enclosure.
- Do not install in damp or wet locations

SAVE THESE INSTRUCTIONS

INSTALLATION OF STEM KIT TO CEILING (FIG. 1)

Step 1. Thread NUT onto STEM.

Step 2. Insert STEM through center hole in MOUNTING STRAP.

Step 3. Thread other NUT on STEM so that MOUNTING STRAP is between the two nuts. Tighten nuts.

Step 4. Install MOUNTING STRAP onto junction box with screws provided with the junction box.

Step 5. Slide CANOPY cover up to ceiling and fasten to STEM with screw provided.

INSTALLATION OF STEM KIT TO TRACK (FIG. 2)

Step 1. Slide COVER onto STEM.

Step 2. Thread both nuts onto STEM allowing room for HANGER BRACKET (installed in next step).

Step 3. Slide HANGER BRACKET between the two nuts on STEM and then tighten.

Step 4. Raise TRACK into place and align hole in TRACK with hole in HANGER BRACKET.

Step 5. Insert SCREW through TRACK and tighten with NUT.

Step 6. Slide COVER into place

INSTALLATION OF STEM KIT TO FEED CONNECTOR (FIG. 3)

Step 1. Remove knock-out from FEED CONNECTOR.

Step 2. Thread NUT onto STEM.

Step 3. Install FEED CONNECTOR onto STEM.

Step 4. Thread remaining NUT onto nut onto STEM and tighten.

CAUTION

Mounting holes are predrilled to accept stem kits. For 4 and 8 foot track lengths 2 kits are required. Kits may be mounted at connectors or at predrilled mounting hole 8 inches from end of track. If track is field cut, and stem is not being mounted at the connector a new hole must be drilled no greater than 8 inches from the end of the track to mount the stem kit.

FIG 1

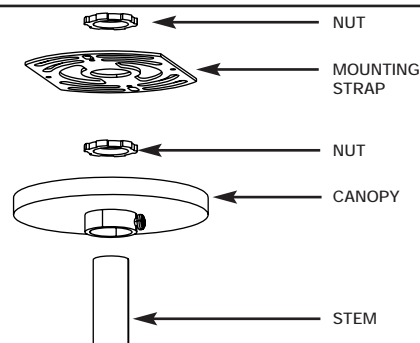


FIG 2

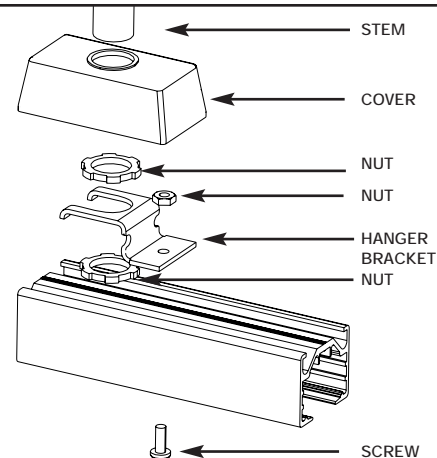


FIG 3

